striker 5

by OmniSistem

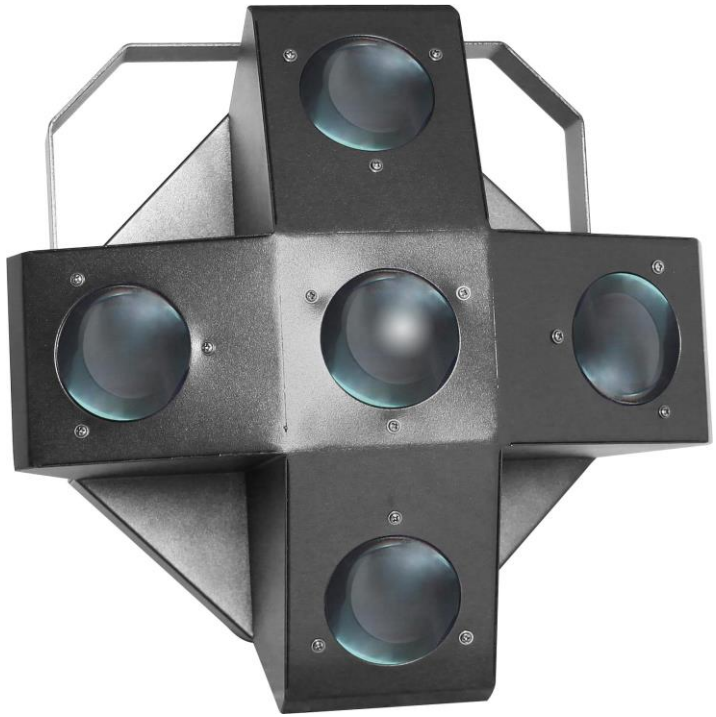

by OmniSistem
www.omnisistem.com
6403 South 208th Street, Kent, WA 98032, USA
Tel: 253.395.9500 Fax: 253.395.9494

INCLUDED IN BOX

- ✓ 1 x OmniSistem Striker5
- ✓ YOKE, KNOBS, SPACERS
- ✓ POWER CORD
- ✓ USER MANUAL

UNPACKING INSTRUCTIONS

Upon receiving the unit, unpack carton and verify that all parts have been received in good condition. If there is an sign of damage to the carton or unit due to shipping or mishandling, notify the shipper immediately. Keep original packing materials in the event the unit must be returned for any reason or recycle it when possible. All fixtures must be returned in their original packaging.

In the unlikely even an accessory is missing that should have been received with the unit or if something is wrong with the unit, notify OmniSistem immediately **WITHIN 3 DAYS** of receiving the item. If notification is not received within 3 days, unit is considered to have been received with all components and without damage.

CONTACT US

OMNISISTEM
6403 SOUTH 208TH STREET
KENT, WA 98032
TEL: 253-395-9500
FAX: 253-395-9494
WWW.OMNISISTEM.COM
OFFICE HOURS: MONDAY – FRIDAY 8AM - 5PM PST
TECHNICAL SUPPORT: M - F 9AM - 4PM PST

NOTE: *INFORMATION ON RETURNING YOUR PRODUCT FOR REPAIR IS ON THE WARRANTY PAGE.*

QUICK SPECS

POWER:	AC 100-240v 50/60Hz
POWER CONSUMPTION:	100W
LED POWER:	3W
LED COUNT:	25 RGBWA LEDS
CONTROL:	DMX-512 (1, 3, 9, 25, 29 CHANNELS) SOUND ACTIVE STAND ALONE MASTER/SLAVE
DIMENSIONS:	17" x 17" x 12"
WEIGHT:	13 lbs

SAFETY INFORMATION

- This unit is intended for indoor use only.
- Ensure the power source is of the correct voltage for this fixture. Connect power through a direct switch circuit, NOT a dimmer or variable circuit source.
- Do not install or operate the device in harmful environment conditions. (i.e. extreme heat, cold, moisture or dust)
- If the unit has been exposed to extreme environmental conditions or drastic temperature fluctuations, ensure the unit is returned to room temperature before operating.
- Do not block fan or ventilation slots while operating unit.
- Do not aim smoke or bubble effects near unit.
- Do not operate the unit during thunderstorms.
- Disconnect power prior to replacing fuse, servicing or cleaning unit.
- Do not use solvents or abrasive cleaners to clean the unit. Use a damp cloth only.
- Modification(s) to the device or power cord will result in termination of the dealer/manufacturer's warranty.
- Use safety cable for added security when installing the unit by the hanging bracket.
- Avoid direct eye contact with the light source.
- Do not connect this unit to a dimmer pack.
- Do not leave unit unattended while operating for extended periods of time or overnight

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.
OmniSistem, 2012

- **DISPLAY KEY**

DISPLAY	MODE	FUNCTION
ADDR	DMX ADDRESS	A001 - A512
CHND	CHANNEL MODE	1CH/3CH/ 9CH/ 25 CH/ 29 CH
SLND	SLAVE MODE	NAST (Master), SL1, SL2
SOUN	SOUND MODE	ON/OFF
SENE	SOUND SENSITIVY	0-100
SENE	SOUND SENSITIVITY	0-100
LED	BLACK OUT MODE	LED MODE, YES - NO
DISP	DISPLAY INVERSION	INVERTS MENU DISPLAY

DMX CONTROL SETTINGS

1 CHANNEL MODE

CHANNEL	FUNCTION
CH. 1	000-007 BLACKOUT 008-037 MACRO 01 038-067 MACRO 02 068-097 MACRO 03 098-127 MACRO 04 128-157 MACRO 05 158-187 MACRO 06 188-217 MACRO 07 218-247 MACRO 08 248-255 RANDOM

3 CHANNEL MODE

CHANNEL	FUNCTION
CH. 1	000-007 MANUAL 128-142 CHASE 9 008-022 CHASE 1 143-157 CHASE 10 023-037 CHASE 2 158-172 CHASE 11 038-052 CHASE 3 173-187 CHASE 12 053-067 CHASE 4 188-202 CHASE 13 068-082 CHASE 5 203-217 CHASE 14 083-097 CHASE 6 218-232 CHASE 15 098-112 CHASE 7 233-247 CHASE 16 113-127 CHASE 8 248-255 STAND ALONE
CH. 2	000-255 DIMMER
CH. 3	000-007 NO FUNCTION 008-247 STROBR (SLOW TO FAST) 248-255 SOUND STROBE

9 CHANNEL MODE

CHANNEL	FUNCTION
CH. 1	000-255 RED DIMMER
CH. 2	000-255 GREEN DIMMER
CH. 3	000-255 BLUE DIMMER
CH. 4	000-255 WHITE DIMMER
CH. 5	000-255 AMBER DIMMER
CH. 6	000-255 DIMMER
CH. 7	000-007 NO FUNCTION 008-247 STOBE (SLOW TO FAST) 248-255 SOUND STROBE
CH. 8	000-007 MANUAL 128-142 CHASE 9 008-022 CHASE 1 143-157 CHASE 10 023-037 CHASE 2 158-172 CHASE 11 038-052 CHASE 3 173-187 CHASE 12 053-067 CHASE 4 188-202 CHASE 13 068-082 CHASE 5 203-217 CHASE 14 083-097 CHASE 6 218-232 CHASE 15 098-112 CHASE 7 233-247 CHASE 16 113-127 CHASE 8 248-255 STAND ALONE
CH. 9	000-007 HOLD 008-255 SPEED (SLOW TO FAST)

25 CHANNEL MODE

CHANNEL	FUNCTION
CH. 1	000-255 RED LENSE 1 DIMMER
CH. 2	000-255 GREEN LENSE 1 DIMMER
CH. 3	000-255 BLUE LENSE 1 DIMMER
CH. 4	000-255 WHITE LENSE 1 DIMMER
CH. 5	000-255 AMBER LENSE 1 DIMMER
CH. 6	000-255 RED LENSE 2 DIMMER
CH. 7	000-255 GREEN LENSE 2 DIMMER
CH. 8	000-255 BLUE LENSE 2 DIMMER
CH. 9	000-255 WHITE LENSE 2 DIMMER
CH.10	000-255 AMBER LENSE 2 DIMMER

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.
OmniSistem, 2012

CH. 11	000-255 RED LENSE 3 DIMMER
CH. 12	000-255 GREEN LENSE 3 DIMMER
CH. 13	000-255 BLUE LENSE 3 DIMMER
CH. 14	000-255 WHITE LENSE 3 DIMMER
CH. 15	000-255 AMBER LENSE 3 DIMMER
CH.16	000-255 RED LENSE 4 DIMMER
CH. 17	000-255 GREEN LENSE 4 DIMMER
CH. 18	000-255 BLUE LENSE 4 DIMMER
CH. 19	000-255 WHITE LENSE 4 DIMMER
CH. 20	000-255 AMBER LENSE 4 DIMMER
CH. 21	000-255 RED LENSE 5 DIMMER
CH. 22	000-255 GREEN LENSE 5 DIMMER
CH. 23	000-255 BLUE LENSE 5 DIMMER
CH. 24	000-255 WHITE LENSE 5 DIMMER
CH. 25	000-255 AMBER LENSE 5 DIMMER

29 CHANNEL MODE

CHANNEL	FUNCTION
CH. 1	000-255 RED LENSE 1 DIMMER
CH. 2	000-255 GREEN LENSE 1 DIMMER
CH. 3	000-255 BLUE LENSE 1 DIMMER
CH. 4	000-255 WHITE LENSE 1 DIMMER
CH. 5	000-255 AMBER LENSE 1 DIMMER
CH. 6	000-255 RED LENSE 2 DIMMER
CH. 7	000-255 GREEN LENSE 2 DIMMER
CH. 8	000-255 BLUE LENSE 2 DIMMER
CH. 9	000-255 WHITE LENSE 2 DIMMER
CH.10	000-255 AMBER LENSE 2 DIMMER
CH. 11	000-255 RED LENSE 3 DIMMER
CH. 12	000-255 GREEN LENSE 3 DIMMER
CH. 13	000-255 BLUE LENSE 3 DIMMER
CH. 14	000-255 WHITE LENSE 3 DIMMER
CH. 15	000-255 AMBER LENSE 3 DIMMER
CH.16	000-255 RED LENSE 4 DIMMER
CH. 17	000-255 GREEN LENSE 4 DIMMER
CH. 18	000-255 BLUE LENSE 4 DIMMER
CH. 19	000-255 WHITE LENSE 4 DIMMER
CH. 20	000-255 AMBER LENSE 4 DIMMER

CH. 21	000-255 RED LENSE 5 DIMMER
CH. 22	000-255 GREEN LENSE 5 DIMMER
CH. 23	000-255 BLUE LENSE 5 DIMMER
CH. 24	000-255 WHITE LENSE 5 DIMMER
CH. 25	000-255 AMBER LENSE 5 DIMMER
CH. 26	000-255 DIMMER
CH. 27	000-007 NO FUNCTION 008-247 STOBE (SLOW TO FAST) 248-255 SOUND STROBE
CH. 28	000-007 MANUAL 128-142 CHASE 9 008-022 CHASE 1 143-157 CHASE 10 023-037 CHASE 2 158-172 CHASE 11 038-052 CHASE 3 173-187 CHASE 12 053-067 CHASE 4 188-202 CHASE 13 068-082 CHASE 5 203-217 CHASE 14 083-097 CHASE 6 218-232 CHASE 15 098-112 CHASE 7 233-247 CHASE 16 113-127 CHASE 8 248-255 STAND ALONE
CH. 29	000-007 HOLD 008-255 SPEED (SLOW TO FAST)

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.
OmniSistem, 2012

WARRANTY GUIDE - SERVICE AND REPAIRS

Thank you for choosing OmniSistem for your lighting and sound needs. The quality of our products is our number one priority. In order to serve you better, we ask that you carefully read through the warranty guide. Should you incur a problem with your fixture, please call our office at 253.395.9500, our knowledgeable technical specialists are available to assist you.

A. Our warranty is limited to manufacturing defects in material and workmanship within the allotted time period. Warranty status is valid from the date of purchase.

- OmniSistem Lighting: 1 Year Limited Warranty
- OmniSistem LEDs: 1 Year Limited Warranty
- OmniSistem Lasers: 1 Year Limited Warranty (Fixture), 180 Days (Diodes)
- OmniSistem Beta Three® Sound: 1 Year Limited Warranty
- OmniSistem Demo Products: 90 Days

B. Exclusions to warranty:

- Parts designed to diminish over time including lamps, fuses, brushes, contact rings, and lamp sockets.
- Damage or failure caused by abuse, misuse, faulty installation and operation, improper or inadequate maintenance, and any unauthorized repair not carried out by OmniSistem or authorized dealer are excluded from this warranty.
- Accessories and/or peripheral equipment included with the product including but not limited to: carry cases, cords, batteries, clamps, lamps and brackets (unless otherwise specifically stated).
- Any unit that has been modified from its original form.

C. For warranty service you must obtain a Return Authorization number (RA#) before sending back the product by calling the OmniSistem repair department at 253.395.9500. Please visit the "Technical" section on our website (www.omnisistem.com) and fill out the repair request form. Include this form inside the box and write the RA# on the outside of the package.

D. Send a copy of your original purchase receipt along with the repair request form. It is the original purchaser's responsibility to provide proof of purchase from an authorized OmniSistem dealer. Units that were sold "as-is" or used are not covered under OmniSistem's warranty program.

E. All shipping charges must be pre-paid. Items sent collect will be refused at sender's expense. If the requested repairs or service (including parts replacement) are within the terms of this warranty, OmniSistem will pay return shipping charges within the United States. For items that need to be expedited, OmniSistem will pay for ground service and receiver will pay the difference between the services. If repairs fall outside of the terms of this warranty, OmniSistem will return items COD (cashier's check or money order only) via UPS ground service.

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.
OmniSistem, 2012